


M12 S-Code (12A AC Power)




M12 S-Code male panel connector, front side fastening, PCB Contacts M12 S-型 公头 板端连接器 前锁 PCB焊针型

Front Fastened 前锁

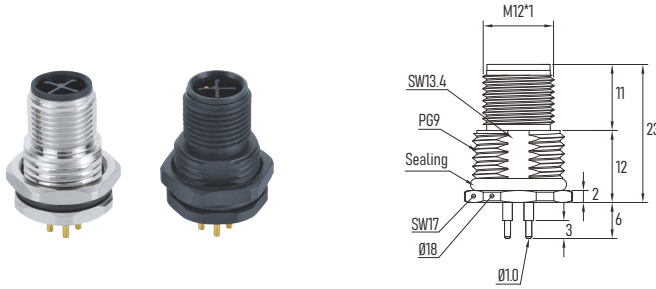

Recommended Panel Cut-out 面板开孔建议

Chassis side	PG9	M16
A	15.3 ^{+0.1} ₋₀	16.1 ^{+0.1} ₋₀
B	PG9	M16x15
C	13.5 ^{+0.1} ₋₀	13.6 ^{+0.1} ₋₀



Connector Technical data 技术参数

Contacts No. Pin位/芯数	2+PE (3 Pin)	3+PE (4 Pin)
Front View 正视图		
Reference Standard 参照标准	IEC 61076-2-111	
Rated current 额定电流	12A	
Rated voltage 额定电压	630V	
Impulse voltage 脉冲高压	2500V	
Locking system 锁紧方式	M12 x 1.0 screw / M12 螺丝锁紧	
Tightening Torque 螺丝扭矩	Recommend/ 建议:0.6Nm, Max/ 最大:1.0Nm	
Termination 接线方式	PCB Dip Soldering / PCB浸焊	
Rated temperature 温度范围	-25 °C ... +80 °C; - 40 °C ... +105 °C	
Insulation resistance 绝缘电阻	≥100MΩ	
Contact resistance 接触电阻	≤5mΩ	
Contact carrier 胶芯材料	PA66 + GF	
Screw nut 螺丝材料	Brass, CNC, Nickel-plated 黄铜 镀镍 机加工 / PA66 + GF 尼龙加玻纤	
Contact Pin针端子	Brass 黄铜	
Contacts plating 端子镀层	Au (Gold) 镀金	
O-ring 密封圈	FKM/ Silicon 氟橡胶/硅胶	
Protection degree 防护等级	IP67, IP68	
Pollution degree 污染等级	3	

Ordering No. 订购料号

Poles 芯数	Panel Front Side Fastening 板前锁			Panel Rear Side Fastening 板后锁		
	PG9	M16x1.5	PG9 Plastic 塑胶	PG9	M16x1.5	PG9 Plastic 塑胶
2+PE (3 Pin)	MC03P1LPSBP9	MC03P1LPSB16	MC03P1LPSPP9	MC03P3LPSBP9	MC03P3LPSB16	MC03P3LPSPP9
3+PE (4 Pin)	MC04P1LPSBP9	MC04P1LPSB16	MC04P1LPSPP9	MC04P3LPSBP9	MC04P3LPSB16	MC04P3LPSPP9

PCB Layout Reference 孔位分布与钻孔建议

