


7/8" Power-Tap Male Splitter, Molded Cable, End with Terminal

7/8" T-型 电源线 预铸电缆 尾部压接端子

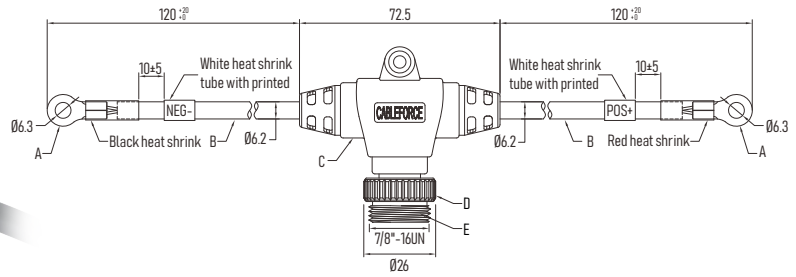

Connector Technical data 技术参数

Contacts No. Pin位/芯数	4Pin
Front View 正视图	
Rated current 额定电流	
Rated voltage 额定电压	300V
Impulse voltage 脉冲高压	2500V
Locking system 锁紧方式	7/8" screw / 7/8" 螺丝锁紧
Tightening Torque 螺丝扭矩	Recommend/ 建议: 1.5Nm, Max/ 最大: 2.0Nm
Termination 接线方式	Crimping/ 压接型
Wire gauge 适配线规	0.75~1.25mm ² (AWG 16~18)
Rated temperature 温度范围	-25 °C ... +80 °C
Insulation resistance 绝缘电阻	≥100MΩ
Contact resistance 接触电阻	≤5mΩ
Connector body 外壳材料	TPU
Contact carrier 胶芯材料	TPU + GF
Screw nut 螺丝材料	Brass, CNC, nickel-plated 黄铜 镀镍 机加工
Contact Pin针端子	Brass 黄铜
Contacts plating 端子镀层	Au (Gold) 镀金
O-ring 密封圈	FKM/ Silicon O-Ring 氟橡胶/ 硅胶
Protection degree 防护等级	IP67, IP68
Pollution degree 污染等级	3

Ordering No. 订购料号

Poles 芯数	Part No. 料号
4 Pin	MF04T6-F16W012-T

Wiring Diagram 接线表

